



Our best golf car battery yet...

POWER MASTER™



The Deka Power Master™ will give you all the power you need to get through two rounds comfortably without needing a recharge - providing it is maintained and charged correctly.

CONVENIENT LIFTING HANDLE



This battery includes a variety of design features that allow for easy watering and installation, faster maintenance turnaround times and longer cycle life. East Penn engineers completely redesigned every aspect of their original golf car battery to create a better product that is as durable and user-friendly as possible. This battery is made with pride by quality craftsmen in our state-of-the-art manufacturing facilities, and subjected to over 250 rigorous quality control checks during every phase of production.

QUALITY SYSTEM
CERTIFIED TO
ISO 9001
CRAFTED WITH
PRIDE IN THE U.S.A.



Deka POWER MASTER BATTERIES

FEATURES	BENEFITS
• High density oxide paste...	• Produces more energy per pound.
• Integrated "twist-and-release" vent cap "quick fill" system...	• Releases vent caps in single motion design, making maintenance a snap. Leakproof design.
• Ergonomic lift handles...	• Reduces the risk of slippage. Designed for easier installation.
• Heavier grids and plates...	• Provides longer cycle life, better added value.
• Thicker plate straps...	• Lowers resistance, delivers better performance, longer life.
• Heavy-duty, bulge-resistant polypropylene casing material...	• Stabilizes and protects the groups for longer battery life. Resists bulging.
• Case heat sealed to the cover...	• Ensures leakproof design.
• Through-partition connectors...	• Decreases internal resistance, increasing power.
• Computer-controlled production...	• Assures that grid casting, plate pasting, curing, and formation meet rigid quality specifications.
• Glass mat, dual-insulation, "deep pocket" envelope separators...	• Protects plates and locks active material to the grid to retard shedding and prevent shorts. Glass fibers strengthen plate.
• Three terminal configurations...	• Fits virtually any application.
• Over 250 quality control checks...	• Assures the highest quality.

NEW PART NO.		COLOR CODE COVER/CASE	TERMINAL	FOOT NOTES	20 A.H. RATE	6 A.H. RATE	MINS. OF DISCH. @ 75 AMPS	VOLTS	QUARTS (LITERS) OF ACID	APPROXIMATE WEIGHT lbs. (kgs.)		MAXIMUM OVERALL DIMENSIONS inches (mm)			OLD PART NO.
WET	DRY									WET	DRY	L	W	H	
GOLF CAR															
GC10	—	BB	T872	•O	190	156	100	6	—	59 (26.8)	—	10¼ (260)	7½ (181)	11% (289)	7GCS
GC10G	—	BB	T881	•G	190	156	100	6	—	59 (26.8)	—			10% (276)	7G
GC10P	—	BB	TSAE	•S	190	156	100	6	—	59 (26.8)	—			10% (270)	7GCA
GC15	—	CC	T872	•O	215	178	115	6	—	63 (28.6)	—			11% (289)	9GCS
GC15G	GC15GD	CC	T881	•G	215	178	115	6	6½ (6.1)	63 (28.6)	44 (19.9)	10% (276)	9G / 9GD		
GC15P	—	CC	TSAE	•S	215	178	115	6	—	63 (28.6)	—	10% (270)	9GCA		
GCSTRAP	Golf Car Strap Handle when ordered individually. One strap shipped per full pallet of 6-volt golf car batteries.														
For gas engine golf cars:															
426G	—	BB	T881	+GHM	530CA	425CCA	60RC	12	—	26 (11.8)	—	8% (225)	6% (171)	8% (213)	

Vent Cap Information: All batteries are shipped with quick release one-quarter turn gang vent caps. To order individual vent caps on batteries, add a "V" suffix i.e., GC10GV, GC15V, etc.

All batteries are wet except the GC15GD.

All above types have microporous polyethylene envelope separators with glass mat (except 424/26G).

424/26G battery has microporous, polyethylene envelope separators.

All batteries manufactured in polypropylene cases.

All ratings conform to B.C.I. specifications.

Dry = Up to 10% reduced capacity.

≈ Nominal Rating

COLOR CODE:


First letter indicates COVER, second letter indicates CASE.

B - Black **C** - Charcoal Gray

FOOTNOTES:

- - Low maintenance - Low antimony grids
- + - Maintenance-free calcium grids
- G** - Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut - T881
- H** - Includes a handle
- M** - Flush manifold vented cover
- O** - Offset post w/ vertical stainless steel 5/16" stud and hex nut - T872
- S** - SAE "automotive type" post - TSAE

TERMINAL SELECTIONS

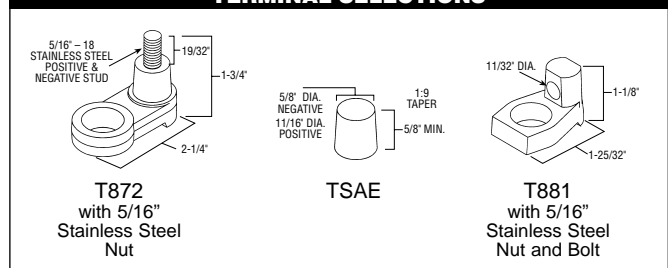

EAST PENN manufacturing co., inc.

DISTRIBUTED BY:

Lyon Station, PA 19536-0147 • Phone: 610-682-6361 • Fax: 610-682-4781

Order Department Hotline: 610-682-4231

WWW: <http://www.eastpenn-deka.com> • E-mail: eastpenn@eastpenn-deka.com

E.P.M. Form No. 0248 7/01
© EPM 2001 Printed in U.S.A.

No part of this document may be copied or reproduced, electronically or mechanically, without written permission from the company.